


REMATCH (Not applicable to the ECO version)

STEP 1

Unfasten the screws on the bottom.




STEP 2

Power the beacon up.

STEP 3

Press the button for 2 seconds, then press the 'Unlock' button on the new controller until the beacon turns off. The new controller is now matched to the beacon.

A beacon can be matched up to 20 controllers. If it exceeds 20, long press the button for 6 seconds to erase all the matching memory. Repeat Step 3 to rematch.

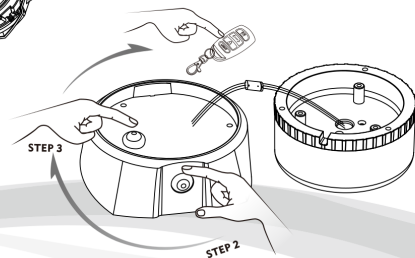


IRAS
DISTRIBUTION
Rouler Alerter Signaler



LED BEACON

DIMENSIONS

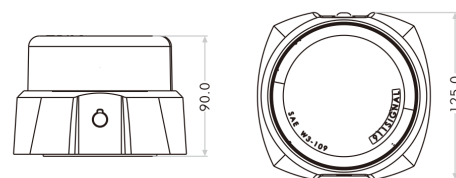

REMOTE CONTROL

- With the beacon turned on, the control will be connected to function.
- Use the control within 35m from the product.

Function Display



ON



Flash Pattern
Selection



OFF



Not
Available




HOW TO CHARGE THE PRODUCT

1. Connect the cigarette plug (included) to the cigarette lighter port in the vehicle (12V only).
2. Charge via 110-220V power with a universal power adapter (sold separately).
3. A 4-hour charge allows 8-hour duration.
4. A 3-hour charge allows 5-hour duration. (Applicable to the ECO version)

MOUNTING

• Magnetic Mount




Magnet Plate



Max speed: 232Km/h

• Permanent Mount with 4 screws



- (Soon available) An iron sheet will be provided for vehicles with aluminum or glass roofs. Choose from adhesive tape, suction cups or velcro tapes to fasten and secure the product.

WIRING

3m long wire
with an A13-54
cigarette plug
(12V)

ON/OFF



FLASH PATTERNS

- | | |
|-----------------------|--|
| 1. Random(Default) | 12. Quad(All) |
| 2. Single(Split) | 13. Quint(All) |
| 3. Double(Split) | 14. Mega(All) |
| 4. Quad(Split) | 15. Ultra(All) |
| 5. Quint(Split) | 16. Single-Quad(All) |
| 6. Mega(Split) | 17. Single-H/L(All) |
| 7. Ultra(Split) | 18. ECE 65 Double Flash Phase 1 |
| 8. Single-Quad(Split) | 19. ECE 65 Double Flash Phase 2 |
| 9. Single-H/L(Split) | 20. ECE 65 120FPM Single Flash Phase 1 |
| 10. Single(All) | 21. ECE 65 120FPM Single Flash Phase 2 |
| 11. Double(All) | 22. ECE 65 125FPM Rotator Flash |